


## FEATURE

Capacities 50~ 500kg  
Structure compact low-rise  
Suitable for the compression  
space measuring occasions.

## OUTLINE DIMENSIONS

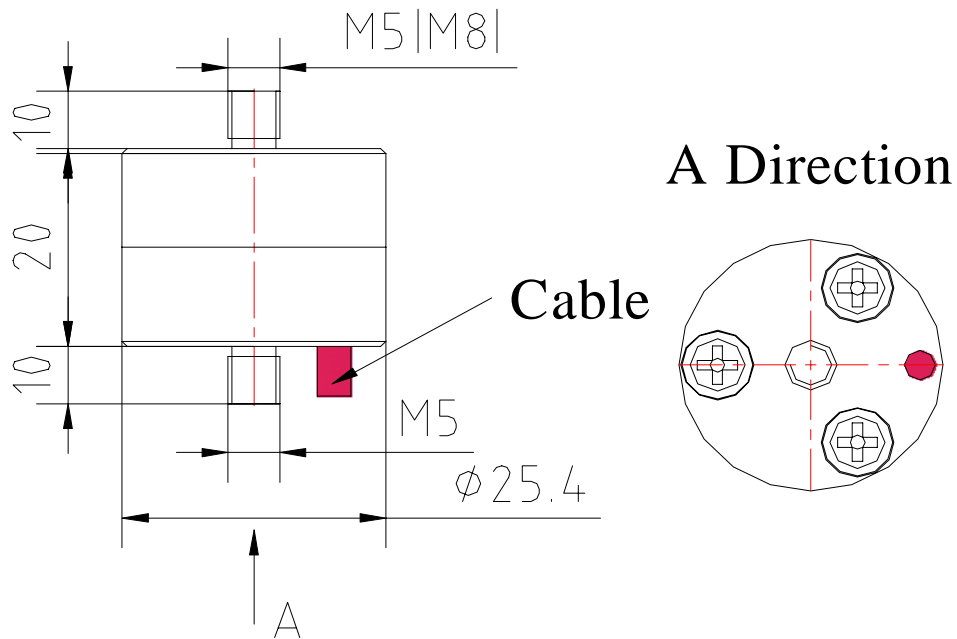

According to customer design size requirements

# GY-ME

## SPECIFICATIONS

Capacity	kg	50, 100, 200, 250, 300, 500
Rated output	mv/v	0.4~0.7±20%
Non-linearity	%F.S	0.5
Hysteresis	%F.S	0.5
Creep in 30 minutes	%F.S	0.5
Zero balance	%F.S	±1
Input resistance	Ω	350±3
Output resistance	Ω	350±2
Insulation resistance	MΩ	≥5000
Excitation voltage	V	5~7V (maximum 8V) AC/DC
Environmental protection		IP67
Safe overload	%F.S	150
Ultimate overload	%F.S	300
Operating temperature range	°C	-10~+40
Material		Stainless steel
Cable Length	m	0.7m

### Wiring Schematic Diagram

